RNAV (GNSS, VOR/DME) OVERLAY
STANDARD ARRIVAL CHART
INSTRUMENT **(STAR)** - ICAO

TRANSITION ALTITUDE 5000
SPEED RESTRICTION TMA KAUNAS
MAX IAS 250 KT below FL100.
MAX IAS 230 KT at all IAFs.

TWR	124.200
	118.500
ATIS	129.050

KAUNAS
RWY 08

AKUMA 2A, DETIG 2A,
ELEKA 2A, PELUT 2A

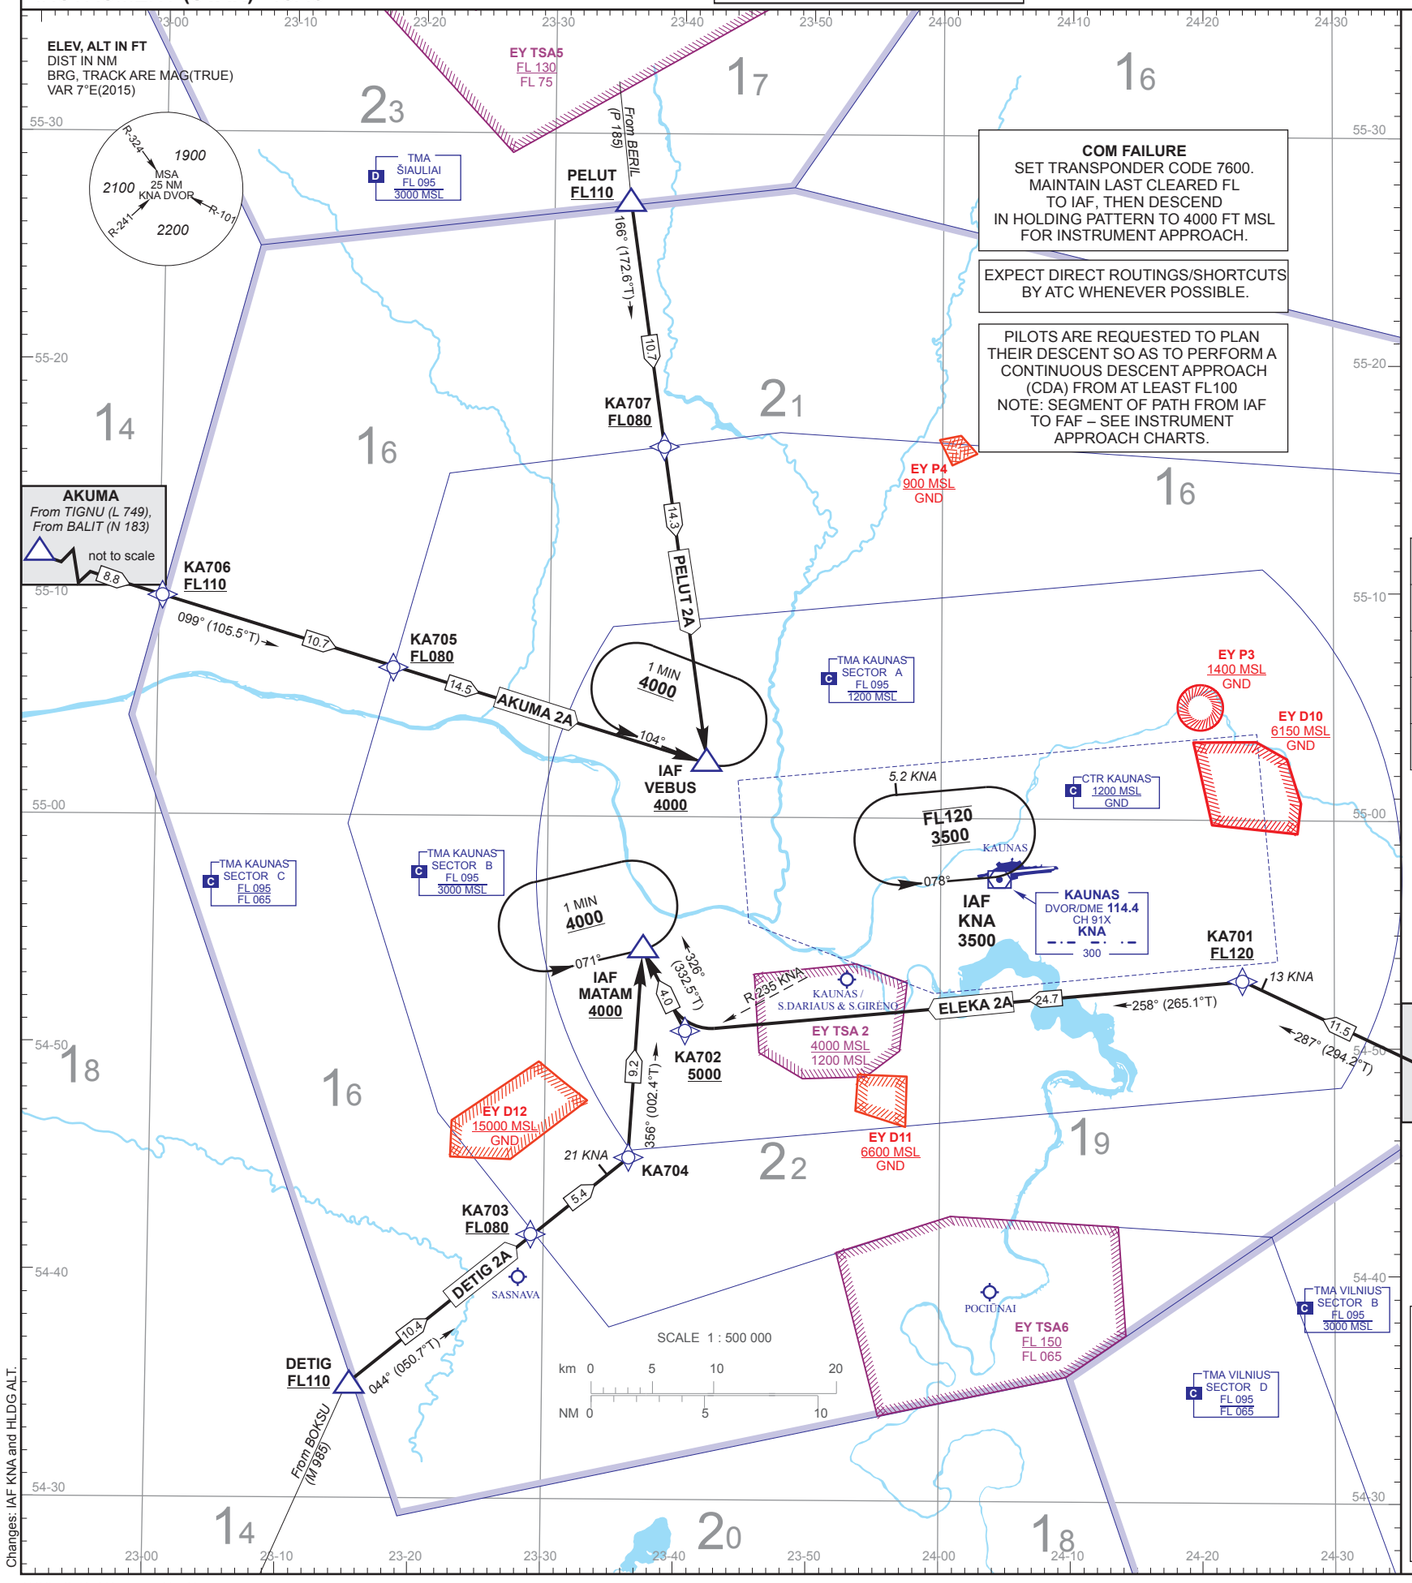

STANDARD INSTRUMENT ARRIVAL (STAR) ROUTES RWY 08

STAR NAME	ROUTE	FL/ALTITUDE RESTRICTIONS
AKUMA 2A	From AKUMA on track 099° proceed to IAF VEBUS.	Cross KNA DME 39 NM at FL110 or above. Cross KNA DME 28 NM at FL080 or above. Cross VEBUS at 4000 FT MSL or above.
DETIG 2A	From DETIG proceed on track 044°. At KNA DME 21 NM turn left on track 356° and proceed to IAF MATAM.	Cross DETIG at FL110 or above. Cross KNA DME 26 NM at FL080 or above. Cross MATAM at 4000 FT MSL or above.
ELEKA 2A	From ELEKA proceed on track 287°. At KNA DME 13 NM turn left on track 258°. Cross R-235 KNA turn right on track 326° and proceed to IAF MATAM.	Cross KNA DME 13 NM at FL120 or above. Cross R-235 KNA at 5000 FT MSL or above. Cross MATAM at 4000 FT MSL or above.
PELUT 2A	From PELUT on track 166° proceed to IAF VEBUS.	Cross PELUT at FL110 or above. Cross KNA DME 24 NM at FL080 or above. Cross VEBUS at 4000 FT MSL or above.

RNAV STAR RWY 08 WAY POINT CODING (All segments – TF legs)

STAR NAME	ROUTE
AKUMA 2A (34.0 NM)	AKUMA - KA706[F110+] - KA705[F080+] - IAF VEBUS[A4000+;K230–]
DETIG 2A (25.0 NM)	DETIG[F110+] - KA703[F080+] - KA704[L] - IAF MATAM[A4000+;K230–]
ELEKA 2A (40.2 NM)	ELEKA - KA701[F120+;L] - KA702[5000+;R] - IAF MATAM[A4000+;K230–]
PELUT 2A (25.0 NM)	PELUT[F110+] - KA707[F080+] - IAF VEBUS[A4000+;K230–]

FOR DETAILED FLIGHT PROCEDURES REFER TO AIP EYKA AD 2.22

WAY POINT COORDINATES

KA701	54 52 41.9N 024 23 10.9E	KNA R107.1/D12.1	**MATAM**	54 54 08.9N 023 37 22.7E	KNA R250.6/D15.7
KA702	54 50 33.9N 023 40 36.9E	KNA R235.8/D15.3	**PELUT**	55 27 04.4N 023 36 37.1E	KNA R325.4/D33.4
KA703	54 41 35.3N 023 29 27.1E	KNA R224.6/D25.6	**VEBUS**	55 02 19.2N 023 42 11.7E	KNA R283.9/D13.4
KA704	54 44 58.3N 023 36 42.1E	KNA R224.6/D20.2	**KNA**	54 57 37.4N 024 03 59.1E	
KA705	55 06 20.4N 023 17 57.6E	KNA R281.8/D27.9			
KA706	55 09 15.4N 023 00 01.4E	KNA R281.2/D38.6			
KA707	55 16 27.3N 023 39 01.5E	KNA R316.1/D23.7			
AKUMA	55 11 37.8N 022 45 10.6E	KNA R281.0/D47.4			
DETIG	54 35 00.8N 023 15 34.0E	KNA R224.6/D36.0			
ELEKA	54 48 01.6N 024 41 20.1E	KNA R107.0/D23.6			

©2012 ORO NAVIGACIJA

THIS PAGE INTENTIONALLY LEFT BLANK

©2012 ORO NAVIGACIJA